



:: Data Sheet



UV-CABINET-NX-C

uv-technik meyer gmbh


Glauburgstraße 34 63683 Ortenberg Germany phone +49 6041 962 80 fax +49 6041 505 77 info@uv-fresh.com www.uv-fresh.de









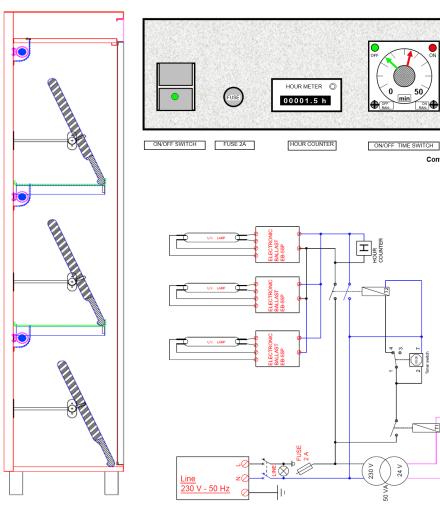

Features:

Control Panel

Highly efficient selective UV-C lamp (at 253.7 nm.), pure quartz.

Body in Stainless Steel AISI 304.

All used materials are tested for resistance to intense UV-C rays.

Reflector in extremely pure mirror bright aluminium.

Doors made of stainless steel AISI 304 with UV resistant polycarbonate window (LEXAN *)

PE rack to lodge about 40-45 knives (1 door cabinet) or 65-70 knives (2 doors cabinet). Timer for treatment duration programming Timer for pause between two subsequent irradiations.

Safety switch on the doors.

Powered by specific electronic ballast for ultraviolet UV-C (220-240 V, 50-60 Hz) lamps.

CE Mark (LVD - EMC - MD - RoHS). Noise: less than 70 dB (A) Vibration: less than 0.5 m/s²



UV-CABINET-H	NX-1/3C	NX-2/3C
TUBE LIFETIME (hours)	9.000	9.000
Suggested replacement	Remove 1 hour from the total	Remove 1 hour from the total
(replace after max. 2 years).	lifetime for every switching-on.	lifetime for every switching-on.
TOTAL CONSUMPTION (W)	170	280
EXTERNAL DIM. AxBxC (mm.)	600 (A)x 450 x 2100	1100 (A)x 450 x 2100
INTERNAL DIM. DXEXF (mm.)	590 (B)x 380 x 1870	1090 (B)x 380 x 1870
WEIGHT(Kg.)	60	90
KNIVES HOUSINGS Nr.	from 11 to 16 (X 3 shelves)	from 20 to 30 (X 3 shelves)
EQUIPMENT	1 door, 3 shelves with knives	2 doors, 3 shelves with knives
SPARE PARTS		
UV TUBE CODE	n.3 CHS-40WH	n. 3 CHS-90WH
BALLAST CODE	n.3 EB-55P	n.3 EB-55P
TIMER SWITCH CODE	n.1 PM4HW-H-AC240V-W-J	n.1 PM4HW-H-AC240V-W-J